


VS28 Reference Subwoofer

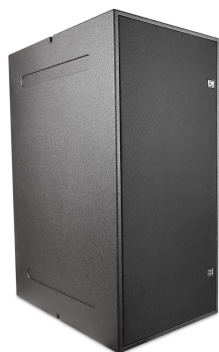

- **V Series Family-Heavyweight**
- **Touring - Fixed installation**
- **Horizontal / Vertical / Cardioid**
- **Rigging**
- **VDA18 / VDA12 Controller**

The VS28 subwoofer Loudspeaker contains an 2x18-inch speaker. It has strong impact force, sensitivity and low frequency efficiency. Its internal sides have H-shaped vent progressive shape, allowing laminar flow and reducing turbulent noise. These comprehensive characteristics help to improve the working level.

VS28 is a recommended subwoofer for V15 and V12 line arrays and other QANON AUDIO < products. It adds to the sub-low frequency of the system by enhancing the throwing ability of the low frequency. It allows the operating frequency range of the system to be extended to 25Hz.


The VS28 subwoofer can be used as an independent array or fly at the top of a vertical array composed of V15 or V12 V10 line arrays. VS28 is driven and amplified by C15 or VDA18 power controller. Protect and optimize different configurations of loudspeaker systems, including cardioid

VS28 Technical Specification


| | |
|----------------------|-------------------------------------|
| Type | Subwoofer |
| Frequency Response | 25Hz-200Hz |
| Amplifier Recommend | VDA18 / VDA12 |
| Preset | [V28_60/C] [VS28_100/C] |
| Horizontal | 360° |
| Drivers | LF: 2×18" Neodymium |
| Handling Power (AES) | LF: 3200W |
| Maximum Peak SPL | 143dB/1m |
| Nominal Impedance | LF:4Ω |
| Connections | 2 x NL4 SpeakOn |
| Pin Connections | NL4=LF:+1-1 |
| Height Front | 550mm |
| Height Back | 550mm |
| Width | 1200mm |
| Depth | 800mm |
| Weight | 92kg / 203lb |
| Handle | 4 ergonomic handles |
| Antiskid | 2 ground runners |
| Fastener | 2 side fastener |
| Material | Baltic Birch Plywood |
| Finish | Dark Grey |
| Front | Polyester powder-coated steel grill |
| Rigging | Steel |
| Protection rating | IP45 |



Front



Side

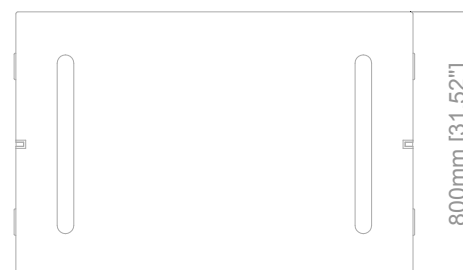

Top