


## VS28 Reference Subwoofer

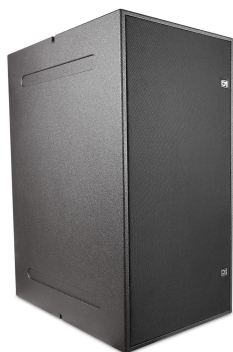

- **V Series Family-Heavyweight**
- **Touring - Fixed installation**
- **Horizontal / Vertical / Cardioid**
- **Rigging**
- **VDA18 / VDA12 Controller**

The VS221 subwoofer Loudspeaker contains an 2x21-inch speaker. It has strong impact force, sensitivity and low frequency efficiency. Its internal sides have H-shaped vent progressive shape, allowing laminar flow and reducing turbulent noise. These comprehensive characteristics help to improve the working level.

VS221 is a recommended subwoofer for V15 and V12 line arrays and other QANON AUDIO < products. It adds to the sub-low frequency of the system by enhancing the throwing ability of the low frequency. It allows the operating frequency range of the system to be extended to 23Hz.


The VS221 subwoofer can be used as an independent array or fly at the top of a vertical array composed of V15 or V12 V10 line arrays. VS221 is driven and amplified by C15 or VDA18 power controller. Protect and optimize different configurations of loudspeaker systems, including cardioid

## VS221 Technical Specification


Type	Subwoofer
Frequency Response	23Hz-200Hz
Amplifier Recommend	VDA18 / VDA12
Preset	[V221_60/C] [VS221_100/C]
Horizontal	360°
Drivers	LF: 2×21" Neodymium
Handling Power (AES)	LF: 3200W
Maximum Peak SPL	146dB/1m
Nominal Impedance	LF:4Ω
Connections	2 x NL4 SpeakOn
Pin Connections	NL4=LF:+1-1
Height Front	600mm
Height Back	600mm
Width	1200mm
Depth	800mm
Weight	108kg / 238lb
Handle	4 ergonomic handles
Antiskid	2 ground runners
Fastener	2 side fastener
Material	Baltic Birch Plywood
Finish	Dark Grey
Front	Polyester powder-coated steel grill
Rigging	Steel
Protection rating	IP45



Front

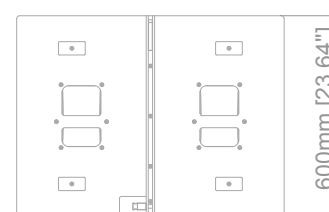

Side

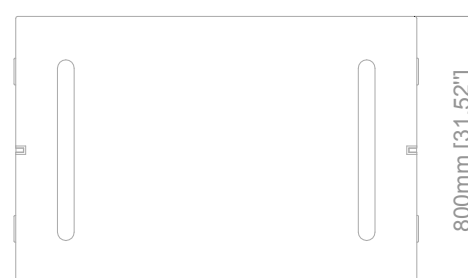

Top