

X8Sub/A Extend Woofer (Passive/Active)



- **X Series Family -Lightweight**
- **Touring - Fixed installation**
- **Horizontal / Vertical / Cardioid**
- **X8 Line source (Fly Sub)**
- **VDA18 / VDA12 Controller**

X8Sub is a recommended subwoofer for X8 line arrays and other QANON AUDIO < products. It adds to the sub-low frequency of the system by enhancing the throwing ability of the low frequency. It allows the operating frequency range of the system to be extended to 36Hz.


The X8Sub extend woofer is internally loaded with a 15-inch speaker. It has powerful impact, sensitivity and low frequency performance, and its internal four corners have a triangular vent progressive shape that allows laminar airflow and reduced turbulence noise. These combined features help to improve the level of operation.

The X8Sub extend woofer can be used as an independent array or fly at the top of a vertical array composed of X8 line arrays. X8Sub is driven and amplified by C15 or H series /VDA power controller. Protect and optimize different configurations of loudspeaker systems, including cardioid


X8Sub Technical Specification

Type	Extend Woofer
Frequency Response	36Hz-300Hz
Amplifier Recommend	VDA18 / VDA12
Preset	[X8S_100/C] [X8S_125/C]
Horizontal	360°
Angle Increments(X10)	0° -2° -4° -6°
Angle Increments(X10)	0° +2° +4° +6°
Drivers	LF:1×15" Neodymium
Handling Power (AES)	LF:1200W
Maximum Peak SPL	134dB/1m
Nominal Impedance	LF:8Ω
Connections	2 x NL4 SpeakOn
Pin Connections	NL4=LF: +1-1
Width*Height*Depth	430mm*560mm*600mm
Weight	35kg / 79.3lb
Handle	4 ergonomic handles
Pole socket	1x35mm Pole socket
Fastener	5 side fastener
Material	Baltic Birch Plywood
Finish	Dark Grey
Front	Polyester powder-coated steel grill
Rigging	Steel
Protection rating	IP45


430mm [16.94"]

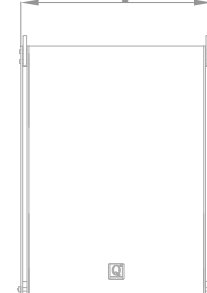

Front

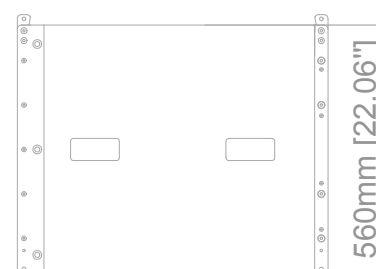

Side

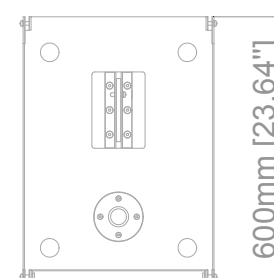

Top